

OEM SUPPORT
CATALOG 2007

©2007 Apogee Instruments Inc.



1020 Sundown Way, Ste 150
Roseville CA 95661 USA
tel 916-218-7450
fax 916-218-7451
<http://www.ccd.com>

Fluorescence image courtesy Dr. David Rapaport, UCSD; echelle spectra, courtesy Catalina Scientific; astro image courtesy Tim Puckett and Adam Block.





SYSTEM OVERVIEW

Apogee Alta and Ascent cameras are designed for a wide range of demanding scientific applications.

In Ascent, we have reduced the size and cost of our electronics and housings, while at the same time maintaining the key features of our popular Alta Series cameras. We've added high-speed 16-bit electronics and some new sensors with resolutions up to 16 megapixels.

The larger Alta cameras offer lower noise and deeper cooling than the Ascent cameras. They also support very high quantum efficiency back-illuminated CCDs.

For both camera series, the direct USB 2.0 link between camera and computer allows easy installation, portability and fast data transfer rate. Ascent maintains compatibility with our Alta ActiveX drivers, as well as Linux and Mac OS X drivers.

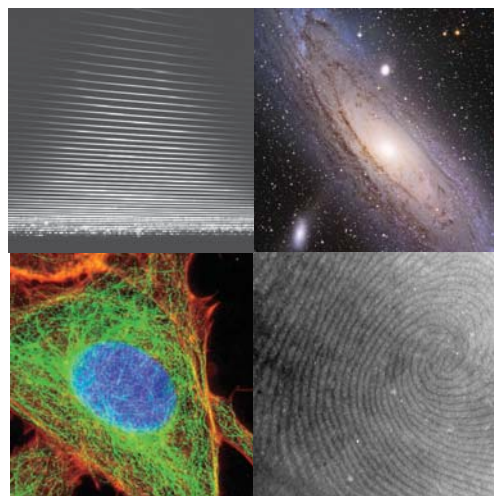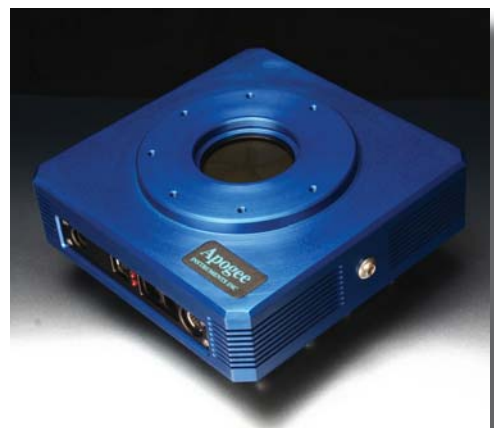

DIVERSITY ADDS STRENGTH

Since 1993, Apogee Instruments has been manufacturing cooled CCD cameras for scientific applications. Our cameras are now used in more than 50 countries, from government and private research laboratories to the best of world-class professional observatories. Apogee cameras have been used for a wide variety of applications, including spectroscopic analysis of water, soil, and gems; detection of anthrax; development of methods and technologies for detection of land mines and improvised explosive devices (IEDs); analysis and detection of contaminants at nuclear reactors; imaging of fingerprints without chemicals; x-ray inspection of car parts; fluorescent imaging of cell tissues and microtitre plates; munitions testing; laser beam profiling; poacher surveillance; mammography; optics testing; discovery of thousands of astronomical objects; and radiometry of a wide variety of light sources.


By expanding into broad markets with diverse demands, Apogee has had to develop a wide variety of technologies to solve our customers' problems. Our astronomy and spectroscopy customers demand low noise, high sensitivity, and high quantitative accuracy. Our life science customers demand speed and ease of use. All customers groups are constantly pushing for higher performance at lower prices. Ascent and Alta cameras address these demands.

A DECADE OF IMPROVEMENTS

We continue to refine not just our electronics and our mechanical designs, but also our procedures, documentation, and customer recordkeeping. It's quite an accomplishment to manufacture and sell thousands and thousands of cameras, but unless they are robust, the result is a customer service nightmare.

In our effort to improve our process, we've achieved the following benchmarks:

- FCC compliance
- CE compliance
- ROHS compliance
- ISO-9000 compliance (in process)

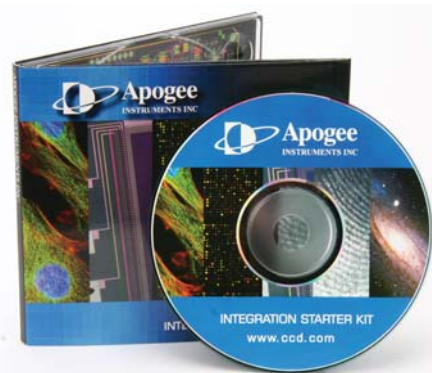

INTEGRATION CD

Apogee has collected all the specification sheets and mechanical drawings for all camera models onto an Integration Starter Kit CD, together with software drivers and documentation.

Apogee Instruments Inc.
1020 Sundown Way, Ste 150
Roseville CA 95661 USA
tel 916-218-7450
fax 916-218-7451

www.ccd.com

©2007 Apogee Instruments Inc. Alta is a registered trademark of Apogee Instruments Inc.

OEM EVALUATION PROGRAM


We can help you choose the right sensor for the job. If we do not already support the sensor that you need, we can discuss adding it to our product line. Once a sensor has been chosen, we provide OEM customers with a system for evaluation. The best way to feel confident that our systems are right for you: try one out.

COST

We supply the best price/performance in the industry. Researchers rely on Apogee to provide excellent value for their investment. OEMs rely on Apogee Instruments to make their products more cost effective and competitive. Please contact our sales team for a quotation for any quantity, large or small. We make it easy for you to get started with us.

BROAD SELECTION

We offer a wide selection of CCDs, from interlines to full frame front-illuminated to back-illuminated, from 512 x 512 up to 4096 x 4096. You can choose from a variety of sizes and shapes, from lowest cost to highest performance, knowing that you can build an entire product line around a single software integration.

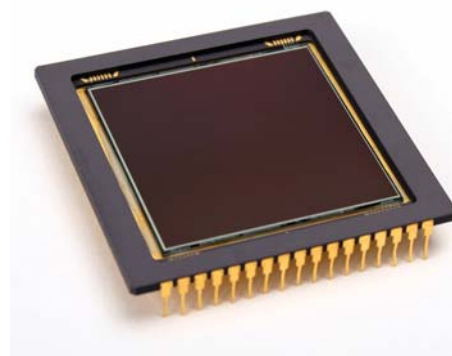

www.ccd.com

QUALITY


Our goal is steady refinement in every aspect of the cameras, including product consistency, product lifetimes, rapid delivery, ease of adaptation and use, and added hardware and software features. We are proud to announce that we will be ISO compliant by 2007.

EASE OF INTEGRATION

All of our systems run on a single universal software driver. If you integrate control of one Apogee system into your custom software environment, you automatically have support for all of our systems. Based on the feedback we get from our customers, integration is simple and straightforward.

CUSTOMIZATION

Apogee Instruments has a long history of working with OEM customers to modify our product line to fit their requirements. Perhaps you need to incorporate custom optical elements or to reduce the back focal distance of the camera. Let us know how we can optimize our cameras to best suit your application.

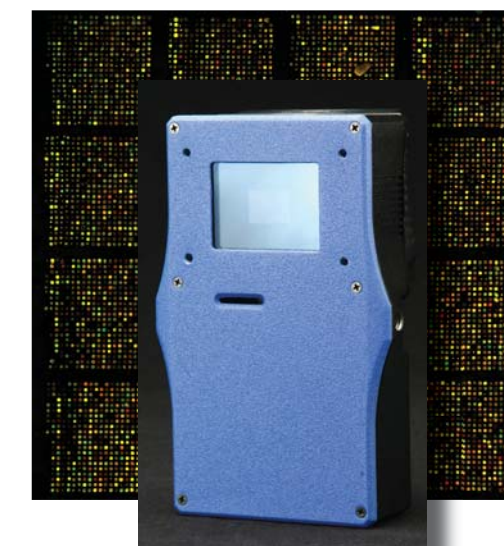

AIDS TO INTEGRATION

FACE PLATE ADAPTERS



Flange adapters allow you to attach anything from an SLR camera lens to a large instrument pack to your Apogee camera. We have sizes to fit all Alta and Ascent cameras. These units are machined precisely for accurate concentricity.

LENS & SLIP-FIT ADAPTERS



We carry Nikon F-mount and Canon FD lens adapters, as well as slip-fit adapters.

USB2 EXTENDERS



The new Icron USB 2.0 Ranger® extenders support USB cameras at distances from 50 meters (Cat 5 cable) to 10 km (fiber cable).

ASCENT versus ALTA SERIES CAMERAS



LOWER COSTS

Many applications require clean, quantitative images, but do not require the ultimate in cooling or low readout noise. The Ascent is an ideal solution for many applications where several thousand dollars may be more important than a few electrons.

HIGHER THROUGHPUT

Ascent was designed to operate at speeds up to the maximum allowed by USB2. Digitization speed is programmable so you can choose your ideal trade-off between speed and noise. All speeds digitize at a full 16 bits.

COMPACT HOUSING

The Ascent's smaller, more lightweight housing fits in many places that the larger Alta cannot.

EMCCD SUPPORT

The Texas Instruments TC247 EMCCD is supported in the Ascent platform.


There are many factors to consider when choosing a CCD camera: cost, resolution, speed, noise, cooling, sensitivity, housing size. Other features may contribute to a system's overall suitability, but most of these features are shared by the Alta and Ascent. In general, consider the following key requirements to determine the optimal platform:

Alta:

- Low readout noise
- Maximum cooling
- Back-illuminated CCDs
- Very large format CCDs
- Optional ethernet interface

Ascent:

- Low cost
- High speed readout
- Compact housing

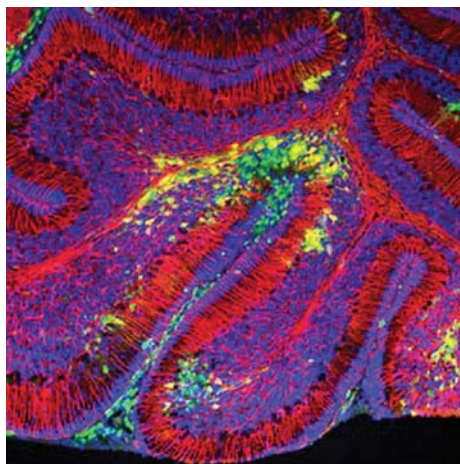

Dr. Nigel Woolf, University of California, San Diego won the second prize in the Nikon Small World 2001 contest with the Apogee KX85 camera, the predecessor to the U2000.



LOW READOUT NOISE

Alta's readout electronics were designed to minimize readout noise. The higher speed software-selectable 12-bit mode is intended for focussing, and not optimized for low noise.

ADVANCED COOLING

To maximize heat dissipation, Alta's large inner chamber, back plate, and heatsinks are machined from a single block of aluminum. The four fans have four programmable speeds.

BACK-ILLUMINATED CCDs

Back-illuminated CCDs are much more expensive than front illuminated CCDs, so they are chosen when necessary for maximum signal-to-noise under low light conditions. Their higher dark current per square millimeter requires the higher cooling of larger Alta housing.

VERY LARGE FORMAT CCDs

The Alta platform is available in several housing sizes, accommodating CCDs up to 50mm on a side.

OPTIONAL ETHERNET

An optional ethernet 100baseT interface is available for the Alta platform.



The primary differences between the Ascent and Alta Series cameras: Ascent is very compact with much lower costs, much faster digitization, and programmable gain. Alta is larger, with better cooling, and lower noise electronics. See the chart below for an overview of the differences. See camera data sheets to get details of a specific model.

Feature	Ascent	Alta
Digitization	16 bit, programmable speed	Fast 12 and slower 16 bit
Maximum throughput	Up to 20 Mpixels/sec (Note 1)	Up to 7 Mpixels/sec (Note 1)
Dual channel interline readout	Standard	N/A
Maximum cooling	40C below ambient (Note 2)	55C below ambient (Note 2)
Programmable gain	Standard	N/A
USB2 interface	Standard	Standard
Ethernet 100baseT interface	N/A	Optional
Electromechanical shutter	Optional, external (Note 4)	Standard, internal (Note 3)
Vane shutter	Standard, internal (Note 5)	N/A
Programmable fan speed	N/A	Standard
Field upgradeable firmware	Standard	Standard
Chamber window	BK7 (optional fused silica)	Fused silica
Peripheral communications	8 pin connector	Two serial COM outputs
General purpose I/O port	Standard	Standard
Programmable LEDs	Standard	Standard
Power input	6V	12V
Internal memory	32 Mbytes	32 Mbytes
Wide variety of CCDs	Yes	Yes
External triggering	Standard	Standard
Image sequences	Standard	Standard
Hardware binning	Up to 4 x height of CCD	Up to 8 x height of CCD
Subarray readout	Standard	Standard
TDI readout (Note 6)	Standard	Standard
Kinetics mode	Standard	Standard
C-mount interface (Note 7)	Optional, external (Note 7)	Standard for D1 housing
Software universality	Standard	Standard
Housing size	5.7" x 3.8" x 1.3"	6" x 6" x 2.5" (Note 8)
Warranty	2 years	2 years
Warranty against condensation	Lifetime	Lifetime

Note 1	Maximum speed varies from model to model.
Note 2	Maximum cooling varies from model to model.
Note 3	Electromechanical shutters are standard for full frame CCDs, and optional for interline CCDs.
Note 4	Electromechanical shutters are optional for all models.
Note 5	Vane shutters are standard for smaller full frame CCDs, optional for interline CCDs.
Note 6	Interline CCDs cannot do TDI readout.
Note 7	CCDs >1" video format are too large for C-mount optics (larger than a KAF-3200ME).
Note 8	Some housings are larger.

INTERNAL MEMORY

32 Mbytes of SDRAM image memory is included in the Alta U Series and Ascent camera heads. 24 Mbytes of image memory is included in the Alta E Series camera head. Local memory serves some important functions:

First, with any network connection and even USB2.0 connection, consistency in download rates cannot be guaranteed. Some manufacturers go to great lengths to attempt to lock Windows® up during downloads to ensure that no pattern noise results from breaks in the digitization process, but such a lockup is not possible with network interfaces. The Alta and Ascent systems buffer the image transfer to protect from noise-producing interruptions.

Second, on heavily loaded USB2 ports, slower USB1.1 applications, loaded networks, or slower TCP/IP transfers, the maximum digitization rate could be limited without a local buffer. Local image memory allows very fast digitization of image sequences up to the limit of the internal camera. The maximum digitization-to-memory rates for 100baseT systems is 1.4 megapixels per second, while the maximum digitization-to-memory rates for Alta USB systems is 11 megapixels per second, and Ascent is 20 megapixels/second..

There is a fundamental difference in the way the Alta USB2 and network image buffers function. The USB2 image buffer is capable of transferring data to the host while digitization of the CCD is active. As long as the USB2 transfer speed is greater than the digitization rate, the memory buffer will never fill. The network memory buffer requires the image digitization to complete prior to transfer across the network.

HARDWARE BINNING

Every Alta and Ascent camera supports hardware binning up to 8 in the horizontal direction and up to the height of the CCD in the vertical direction. Binning can be used to increase frame rate, dynamic range, or apparent sensitivity by collecting more light into a superpixel. See additional detail under CCD University on our website.

www.ccd.com

PROGRAMMABLE LEDs



Two LEDs on the side can be programmed to show status of a variety of the camera functions, such as the camera has reached the set temperature, the shutter is open, or the camera is waiting for an external trigger. Alternatively, the LEDs can be turned off if you are concerned about stray light. The E Series cameras also have two green LEDs that indicate status of the network connection.

SOFTWARE

MaxIm DL/CCD software is standard with every Alta, as well as an ActiveX driver that is universal to all Apogee Alta and Ascent cameras, as well as legacy AP and KX cameras. If you write custom code for an Apogee camera, you won't have to change it later if you change models. Our cameras are also supported by other programs like CCDSoft. A Linux and Mac OS X drivers are also available.

UPGRADEABLE FIRMWARE

The Alta and Ascent systems load all camera operating code on camera start. These configuration files can be updated via the web as we add features and make improvements. Each camera head has coded information identifying the type of system, its configuration, and type of CCD used, as well as the firmware revision in use. This allows automatic configuration of the camera in the field and better customer support from our offices.

SUBARRAY READOUT

Alta and Ascent cameras support readout of an arbitrary sub-section of the array in order to speed up frame rate. Reading half the array, for example, does not increase the frame rate by two because of overhead required in discarding unwanted pixels.

TWO-YEAR WARRANTY

All Apogee cameras have a standard two-year warranty and a lifetime guarantee against condensation in the camera.

EXTERNAL TRIGGERING

The Alta and Ascent camera systems accept external hardware trigger signals through their camera I/O ports for a number of purposes. Software and hardware triggers can be used together. For example, a software or hardware trigger may be used to initiate a single exposure or a sequence of exposures of a specific duration and specific delay between exposures. Alternatively, a software trigger may be used to start a sequence, and the external trigger can be used to trigger each subsequent image in the sequence. In addition, the external trigger can be used to trigger row shifts for time-delayed integration, or can be used to trigger block shifts for kinetic imaging.

SEALED INNER CHAMBERS

The sensors for Alta and Ascent cameras are sealed into an inner chamber filled with argon. The chamber has a lifetime guarantee against condensation.

PROGRESSIVE SCAN (CONTINUOUS IMAGING)

Interline transfer CCDs first shift charge from the photodiode in each pixel to the masked storage diode, and then march the charge through the storage diodes to the serial register. Acquisition of a new image in the photodiodes during readout of the previous image is called "progressive scan." Alta and Ascent cameras both support progressive scan with interline CCDs.

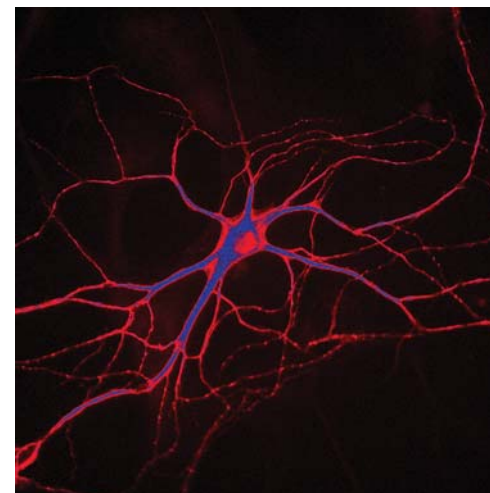


Image courtesy of Prof. Dale Hunter, Tufts University, MA


Specifications subject to change without notice.

TIME-DELAYED INTEGRATION

More formally known in astronomy as time-delay integration (TDI), this technique is a powerful tool for applications requiring the scan of an area larger than the CCD's field of view. The image is clocked down the CCD in synchronization with the object's movement. The CCD must be precisely aligned with the movement of the scene.

The simplest way to illustrate TDI is an astronomical application. The telescope is kept stationary, and the CCD is precisely aligned with the sky. As the Earth rotates and the sky drifts, the image on the CCD is precisely clocked to continue building the image. When the image reaches the last row, it is read to the host computer and added to a continuous strip of sky.

The TDI capability utilizes a 25 MHz time base (Ascents use a 48 MHz time base) and local memory to achieve consistent high resolution performance. TDI mode allows the user to adjust the row shift rate. Timing may be adjusted in 5.12 microsecond increments to a maximum of 336 milliseconds per row shift. The minimum TDI shift time is the digitization time for one row. TDI cannot be done with cameras using interline CCDs, such as the U2000 and U4000.

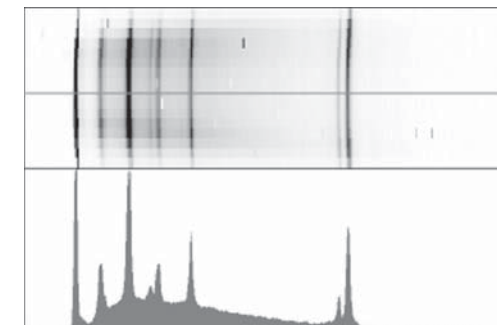


Raman image and spectrum acquired using KestrelSpec™ software from Catalina Scientific (www.catalinasci.com)


www.ccd.com

KINETICS MODE


Kinetics Mode assumes that the user has optically masked off all but the top most section of the CCD. This exposed section is illuminated, shifted by x rows, then exposed again until the user has exposed the entire surface of the CCD with y image slices.

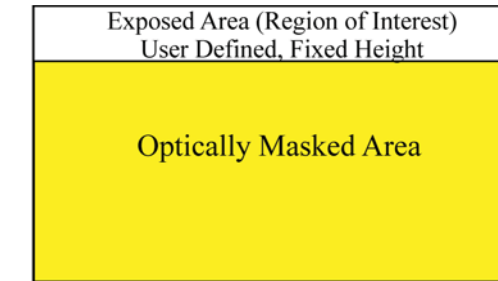

The image in the exposed area is shifted to the masked area per software command, pre-set shift frequency, or external trigger. The number of rows per section is predetermined and constant.

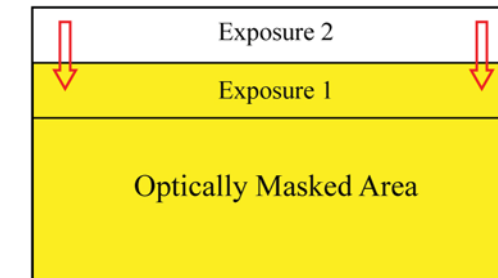

When the number of desired exposures has been reached, or the CCD has been filled (whichever comes first), the entire array is read out and digitized. If you want to use the entire CCD including the exposed area, then the light source needs to be shuttered after the final exposure (externally, electronically, or electromechanically). or using an electromechanical shutter).

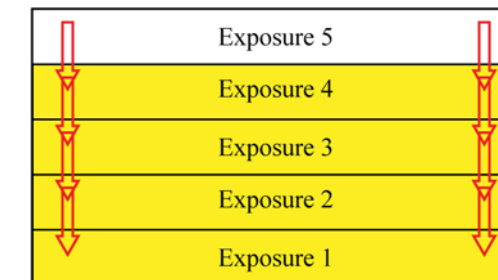

Specifications subject to change without notice.

IMAGE SEQUENCES

Image sequences of up to 65535 images can be acquired and transferred to camera / computer memory automatically. A delay may be programmed between images from 327 microseconds to 21.43 seconds. (This does not mean you can acquire images every 327 microseconds; it means you can program a delay of 327 microseconds between the end of a readout and the start of the next exposure.)

The Ascent and Alta platforms allow for three types of image sequencing:

Application-Driven Sequencing:

This is the most common form of image sequencing. The application merely takes a specified number of successive images. This type of sequencing is suitable when the time between image acquisitions is not short and where slight differences in timing from image to image are not important.

Precision back to back sequencing

Alta and Ascent incorporate a firmware controlled back to back image sequencing mode suitable for image-image intervals from 327uS to a maximum of 21.43 seconds in 327uS intervals. This provides for precision spacing of images in a sequence where windows applications cannot respond.

Fast back to back sequencing (Ratio Imaging - Interlines only)

This is a special form of precision back to back sequencing designed for a fixed <1 microsecond spacing between a pair of interline CCD exposures. The caveat with this mode is that the exposure times for each image must be greater than the readout time for the image. For example, if using the A2000, the readout time for a full frame is about 0.2 seconds so your exposure would need to be in excess of 0.2 seconds.

ALTA SERIES CAMERAS: OVERVIEW

ADVANCED COOLING

The Apogee cooling system has long been one of the most advanced in the industry. The Alta control system has been expanded to 12 bits, allowing a temperature control range of 213K to 313K (-60 to +40 C) with 0.024 degree resolution. Sensors have been added to monitor the heat sink temperature. A power indicator has been added to give the user an idea of how much drive is being given to the CCD cooler. The automatic back-off function is now handled by the firmware and driver. If the system cannot reach the desired temperature, the system automatically backs off to a point where regulation can be maintained, 2 degrees above the maximum temperature reached. The new set point is given to the user. Cooling deltas of 40-60C (depending on sensor area) are typical with simple air cooling.

Apogee now offers liquid recirculation backs for Alta cameras. For customers desiring greater temperature performance where the camera housing will not go below the dew point, specifying liquid recirculation will assure a lower dark count than is possible with forced air cooling.

PROGRAMMABLE FANS

Some customers require a complete absence of vibration during an exposure. The Alta systems have been designed for complete control of the cooling fans. The fans may be turned off, or run at a much slower speed to maintain adequate cooling with no vibration. For applications where vibration is not an issue, the fan speed may be maximized for greatest cooling. The fans used in the Alta system were selected for minimum vibration.



DUAL DIGITIZATION

With our fast USB2 systems, we offer dual digitization: high precision, low noise 16 bit performance as well as high speed 12 bit for focussing and other high frame rate needs. Digitization depth is selectable image by image in software

MGF2 COATED FUSED SILICA OPTICS



Professional grade details like magnesium-fluoride coated fused silica windows. Apogee also offers custom windows, including wedge windows and customer supplied optics.

SINGLE 12V POWER SUPPLY

Alta camera systems include a 12V international power supply (100V-240V input), but can be operated from a clean 12V source.

CABLE LENGTH

Ethernet cabling can go to 100m. USB2 cables are limited to 5m between hubs, with up to 5 hubs, for a total of 30m. However, there are USB1 and USB2 extenders available for operation up to 10 km. The USB1 extenders slow the transfer to a maximum of 500 kpixels per second, but this rate is still a far higher throughput than the E Series systems. USB2 extenders are available using Cat5 cable or fiber optic cable.

OPTIONAL ETHERNET

The Alta E Series cameras first read the entire image into the camera head memory, and then transfer the image to the host computer at a maximum of 200 kpixels/second. An Alta U47 camera with 1 megapixel reads the entire image to the computer in about 1.5 seconds. An E47 reads the image to the camera memory in 1.5 seconds, but then requires an additional 5 seconds to transfer the image to the host computer.


UNIQUE MAC ADDRESS

The Alta E Series cameras each have a unique MAC address so they can be plugged directly into the internet for remote operation. We provide MaxIm software for remote control of the camera. They cannot be controlled through your browser.

Because the camera has slave serial, I2C, and auxiliary filter wheel support, an entire setup can be controlled from behind a single camera interface. For WAN or WWW connections, a full TCP/IP protocol gives safe data transfers at slower speeds.

A special bi-directional digital interface with 6 I/O lines can also be used to interface to other system components. High level shutter signals, as well as digital strobes and triggers, are available.

LIQUID CIRCULATION

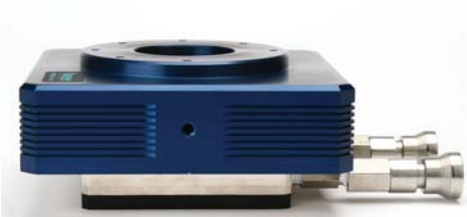

Apogee offers Alta and Ascent liquid recirculation backs for customers wanting to remove heat dissipation from the area of the camera; wanting to house the camera inside an enclosure; or wanting supplemental cooling. The limitation: the temperature of the recirculating liquid must not go below the dew point.

SHUTTERS

Apogee Instruments uses the finest shutters available for our cameras from Vincent and Melles Griot. These shutters have been carefully integrated into our camera heads with minimum impact on back focal distance and camera size. These shutters have a huge advantage of simple rotating blade shutters in terms of light blockage and minimum exposure time.



Alta cameras use three shutter types, depending on the aperture. Apogee shutters use lower voltage coils than those listed as standard by the shutter manufacturers, roughly 1/2 of the standard voltage requirement. The lower voltages extend the lifetimes of the shutters.

D1 housing, small format sensors:
Vincent Uniblitz 25mm Shutter
D2 housing, medium format sensors:
Melles Griot 43mm Shutter
D7 housing, large format sensors:
Melles Griot 63.5mm Shutter

Full frame CCDs typically require an electromechanical shutter unless the light source is gated in some other way. Otherwise light falling on the sensor during the readout process corrupts the image. Interline CCDs shift the charge from the photodiode section of each pixel to the masked storage diode. For low light applications, the mask is sufficiently opaque to prevent smearing. However, in high light applications, interline CCDs require electromechanical shutters to prevent smearing during readout.

COMPACT DESIGN

The Alta systems are designed to be very compact. At 6"x6" and only 2.2" thick with no external electronics, the Alta system packs a lot of power into a small package. The Alta systems are more than a kilogram lighter than their predecessor.


Alta cameras with small format CCDs have a 0.69" (17.5 mm) C-mount back focal distance for direct interface to microscopes and C-mount lenses. Medium format sensors use the D2 housing with 2" thread. Large format sensors use the D7 housing with a 2.5" thread. Back focal distance for the D2 and D7 housing is approximately 1.04" (26.4 mm). All cameras have a bolt circle with metric threads for adaptation to a wide variety of flanges.

OPTIONAL LOW PROFILE HOUSINGS


Lower profile housings are available for all Alta models to achieve <0.5" (<12.7mm) back focal distances without internal shutters.



TWO SERIAL COM PORTS & GENERAL I/O PORT

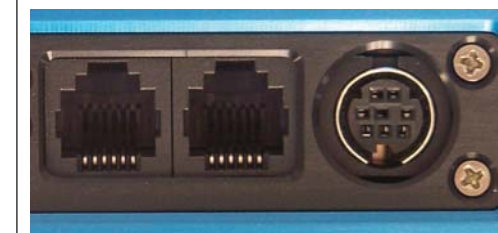

Our general purpose I/O port can tell you when the shutter is open, or can be used for a wide variety of external trigger inputs, including line-by-line control of TDI shifts. Our two serial COM ports can control peripherals like filter wheels through the camera's control cable (USB2 or ethernet).

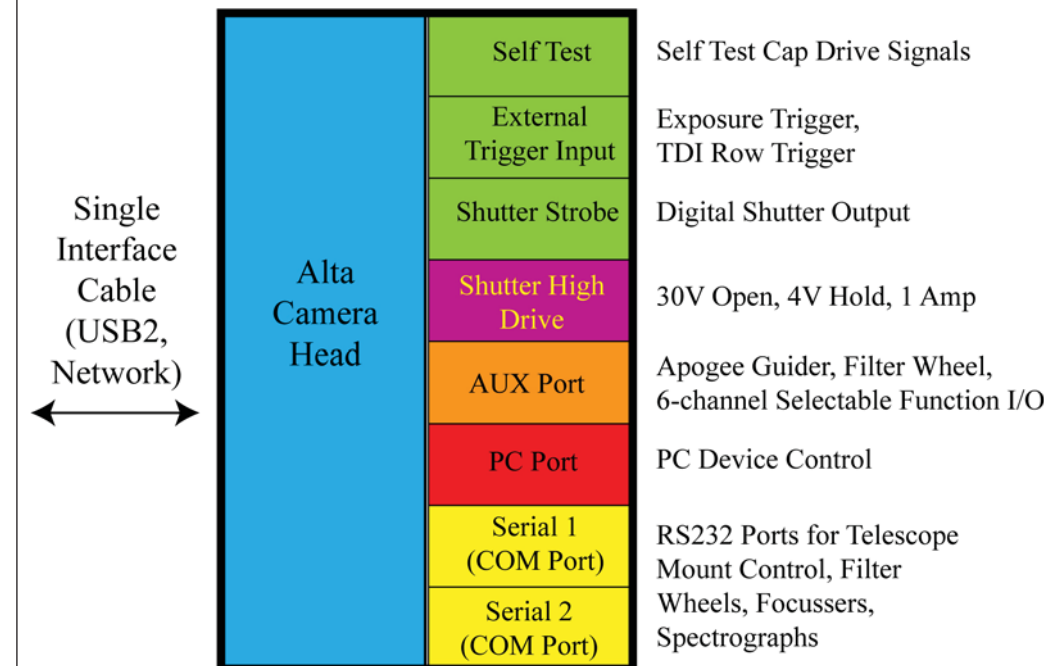

PROGRAMMABLE DIGITIZATION

Unlike previous generations of Apogee cameras with fixed digitization rates for each bit depth, the Ascent cameras feature programmable readout rates using 16-bit digitization. You can choose the best trade-off between noise and readout speed image-by-image. Some CCDs, like the interline transfers, can read two channels at up to 10 MHz each, for a total throughput of over 20 megapixels per second. Other CCDs, like the full frame Kodaks, typically have a maximum useful throughput rate of about 7 to 10 MHz. See individual data sheets for specifics regarding each camera system.

PROGRAMMABLE GAIN AND OFFSET

All Ascent models feature programmable gain and bias offset programmable in the analog-to-digital converter.




ANTI-REFLECTIVE COATED BK7 OPTICS

The standard chamber window for the Ascent system is low cost BK7. An optional fused silica window is also available for applications requiring higher throughput in the ultraviolet.

VANE SHUTTERS

Ascent cameras with full frame CCDs have internal shutters intended to prevent smearing during readout for low light applications. The same professional-grade electromechanical shutters available as standard and internal in the Alta cameras are also available as housed external options with the Ascent cameras.

EMCCD SUPPORT

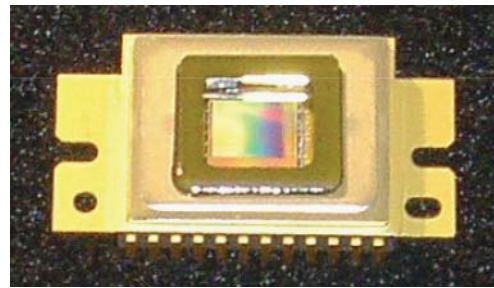


The EMCCD is unique among CCDs. It has a special charge multiplication circuit that intensifies charge on-ccd before readout. Gains of 1 to 2000 are possible on-ccd using this technology, resulting in detection of extremely low light levels. With a gain of 1, the ccd behaves much like a normal CCD with a maximum well depth of 28Ke- and a typical noise of 20e-. With higher gains, ccd output noise approaches 1e- with a severe reduction in usable well depth. The A247 uses an interline frame transfer CCD, eliminating the need for a mechanical shutter and reducing smear.

COMPACT DESIGN

The Ascent systems are extremely lightweight (0.6 kg) and compact. At 5.7" x 3.2" (14.5 x 8.1 cm) and only 1.2" (3 cm) thick with no external electronics, the Ascent is a marvel of compact electronics. The standard back focal distance for all models is about 0.32" (0.8 cm).

SINGLE 6V POWER SUPPLY

Ascent camera systems include a 6V international power supply (100V-240V input), but can be operated from a clean 6V source.

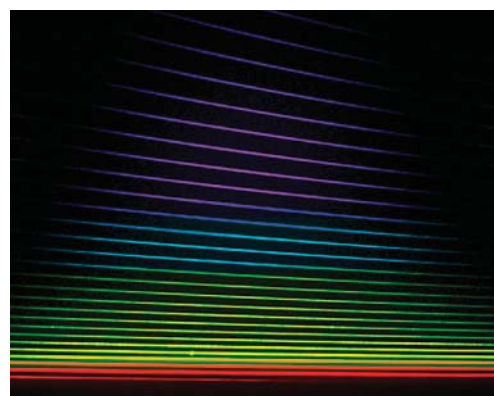

Echelle Spectrograph Image of a Deuterium-Tungsten Light Source

Specifications subject to change without notice.

OPTIONAL LIQUID CIRCULATION



Apogee offers optional Ascent liquid recirculation back as well as temperature-regulated liquid recirculators for customers wanting to remove heat dissipation from the area of the camera; wanting to house the camera inside an enclosure; or wanting supplemental cooling. The limitation: the temperature of the recirculating liquid must not go below the dew point.

ASCENT FILTER WHEEL



Ascent with optional liquid circulation adapter and optional external filter wheel.



Ascent with optional liquid circulation, filter wheel, and slip fit adapter

Alta Series cameras with a USB2 interface use a U prefix, for example, U42. Alta Series cameras with an ethernet interface use an E prefix, for example, E42. All Alta models are available with either interface except the U16, U16M, and U9000 (USB2 only). Ascent models use an A prefix, except the EM247. In addition to the following CCDs, the Ascent supports a variety of spectroscopic format back-illuminated CCDs listed on a following page.

INTERLINE TRANSFER CCDs

Camera Model*	Kodak CCD	Array Size		Total Pixels	Pixel Size (microns)	Array size (mm)		Imaging Area (mm ²)	Diagonal (mm)	Mono=M Color=C
		X	Y			X	Y			
A16000	KAI-16000	4872	3248	15824256	7.4	36	24	866.5	43.3	M,C
A11000	KAI-11002	4008	2672	10709376	9	36	24	867.5	43.3	M,C
U4000, A4000	KAI-4021	2048	2048	4194304	7.4	15.2	15.2	229.7	21.4	M,C
U2000, A2000	KAI-2021	1600	1200	1920000	7.4	11.8	8.9	105.1	14.8	M,C
A340	KAI-0340	648	484	313632	7.4	4.8	3.6	17.2	5.99	M,C

FRONT-ILLUMINATED CCDs

Camera Model	Kodak CCD*	Array Size		Total Pixels	Pixel Size (microns)	Array size (mm)		Imaging Area (mm ²)	Diagonal (mm)	Mono=M Color=C
		X	Y			X	Y			
U16	KAF-16801E	4096	4096	16777216	9	36.9	36.9	1359.0	52.1	M
U16M	KAF-16803	4096	4096	16777216	9	36.9	36.9	1359.0	52.1	M
A105	KAF-10500CE	3916	2624	10275584	6.8	26.6	17.8	475	32	C
U9000	KAF-09000	3058	3058	9351364	12	36.7	36.7	1346.6	51.9	M
A8300	KAF-8300CE	3448	2574	8875152	5.4	18.6	13.9	259	23.2	M,C
U9, A9	KAF-6303E	3072	2048	6291456	9	27.6	18.4	509.6	33.2	M
U10	TH7899*	2048	2048	4194304	14	28.7	28.7	822.1	40.6	M
U32, A32	KAF-3200	2184	1472	3214848	6.8	14.9	10.0	148.7	17.9	M
U2, A2	KAF-1603ME	1536	1024	1572864	9	13.8	9.2	127.4	16.6	M
U13	KAF-1301E	1280	1024	1310720	16	20.5	16.4	335.5	26.2	M
U6	KAF-1001E	1024	1024	1048576	24	24.6	24.6	604.0	34.8	M
U1, A1	KAF-0402ME	768	512	393216	9	6.9	4.6	31.9	8.3	M
U260, A260	KAF-0261E	512	512	262144	20	10.2	10.2	104.9	14.5	M

*The U10 uses an E2V (formerly Atmel, formerly Thomson) TH7899 CCD.

BACK-ILLUMINATED CCDs

For nearly 30 years, back-illuminated CCDs have represented the ultimate in high performance imaging. The highest sensitivity available means shorter exposures and better signal-to-noise. (Monochrome only)

Camera Model	E2V CCD	Array Size		Total Pixels	Pixel Size (microns)	Array size (mm)		Imaging Area (mm ²)	Diagonal (mm)
		X	Y			X	Y		
U42	CCD42-40	2048	2048	4194304	13.5	27.6	27.6	764	39.1
U47	CCD47-10	1024	1024	1048576	13	13.3	13.3	177	18.8
U77	CCD77-00	512	512	262144	24	12.3	12.3	151	17.4
U30	CCD30-11	1024	256	262144	26	26.6	6.7	177	27.4

EMCCDs


EM247	TI TC247	658	496	326368	10	6.6	5.0	32.6	8.24	M,C
-------	----------	-----	-----	--------	----	-----	-----	------	------	-----

Specifications subject to change without notice.

CCD SELECTION, PART 2



CCD SIZES

BACK ILLUMINATED

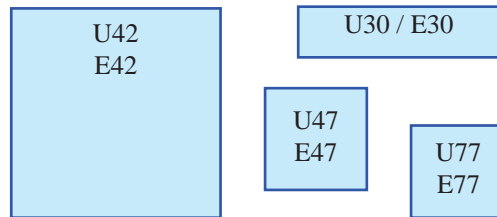


Apogee also offers a variety of spectroscopic format back-illuminated CCDs.

FRONT ILLUMINATED

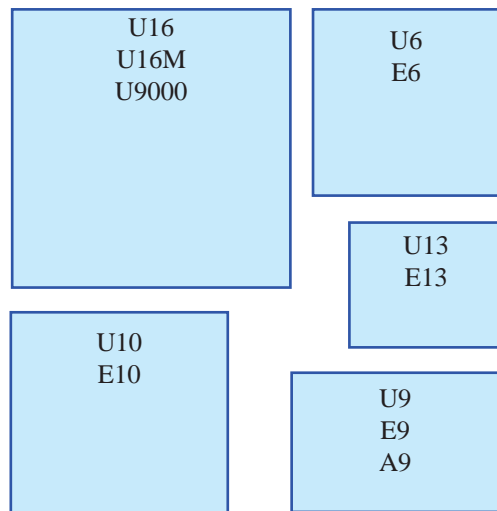

INTERLINES

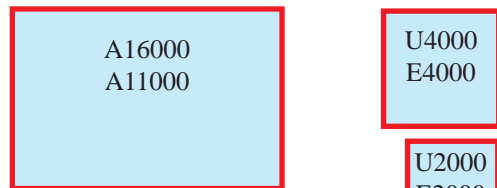


EMCCD




QUANTUM EFFICIENCY

The QE curves below give general representations of the relative differences between the various types of CCDs. For additional detail, please see the data sheets for each camera model at www.ccd.com. QE of back-illuminated CCDs depends on the coating (midband, broadband, UV-enhanced). There are also variations in front-illuminated CCDs: all polysilicon gates; Blue Plus (polysilicon and indium tin oxide gates); microlenses; anti-blooming. See individual camera data sheets for details regarding each sensor.

E2V: BACK-ILLUMINATED & OPEN ELECTRODE CCDs

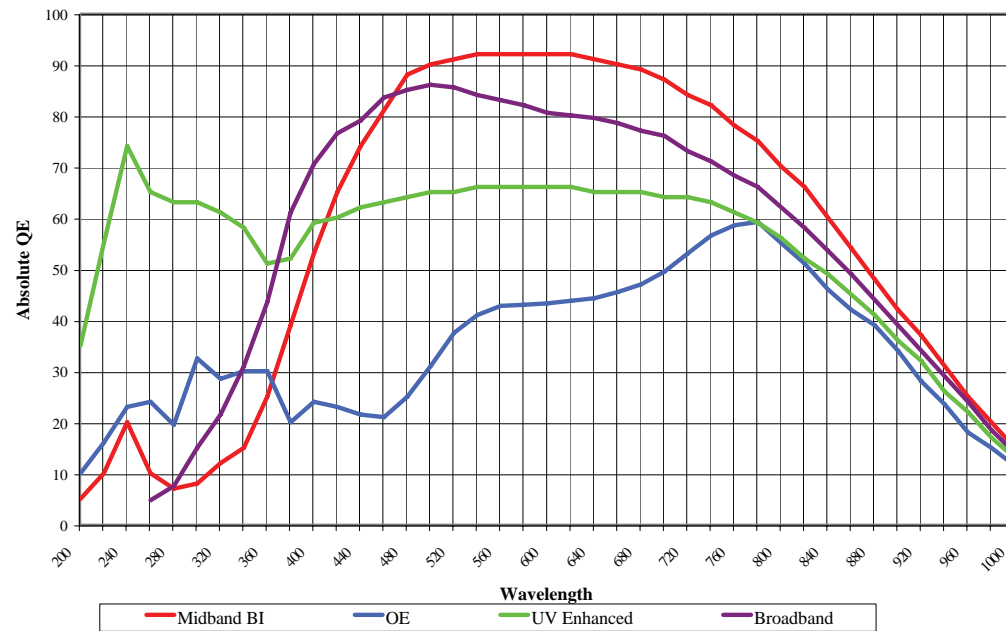

FRONT-ILLUMINATED CCDs

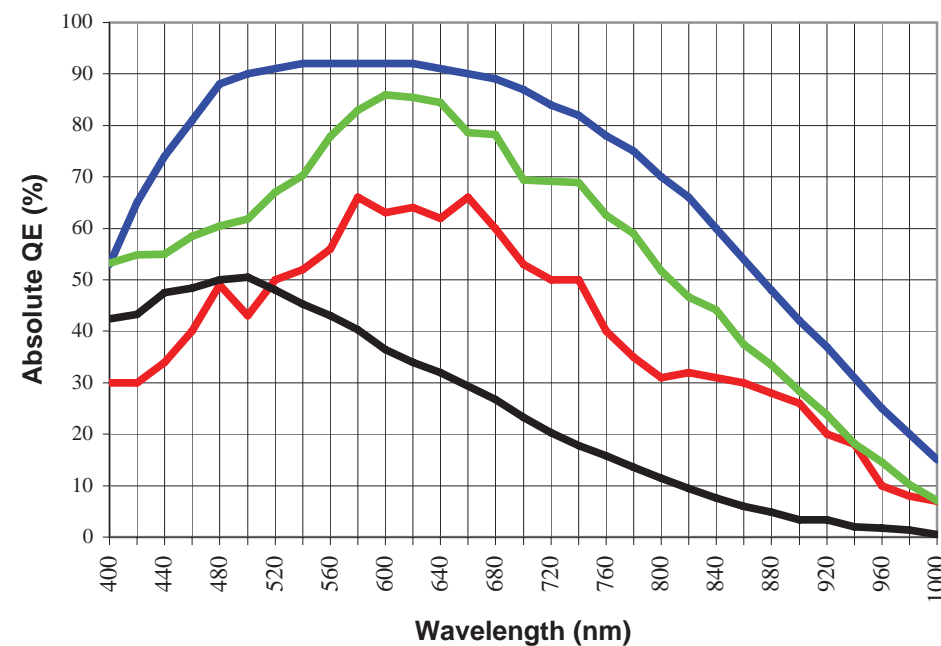


BACK-ILLUMINATED SPECTROSCOPIC FORMAT CCDs


These back-illuminated CCD systems will be setting a new standard for low-cost spectroscopic systems. (Monochrome only)

Camera Model	Hamamatsu CCD	Array Size		Total Pixels	Pixel Size (microns)	Array size (mm)		Imaging Area (mm ²)	Diagonal (mm)
		X	Y			X	Y		
A1109	S10141-1109	2048	506	1036288	12	24.6	6.1	149.2	25.3
A1108	S10141-1108	1024	250	512000	12	24.6	3.0	73.7	24.8
A1107	S10141-1107	512	122	249856	12	24.6	1.5	36.0	24.6
A1009	S10141-1009	1024	506	518144	12	12.3	6.1	74.6	13.7
A1008	S10141-1008	1024	250	256000	12	12.3	3.0	36.9	12.6
A1007	S10141-1007	1024	122	124928	12	12.3	1.5	18.0	12.4
A98	S9840	2048	14	28672	14	28.7	0.2	5.6	28.7

HAMAMATSU: BACK-ILLUMINATED SPECTROSCOPIC FORMAT CCDs

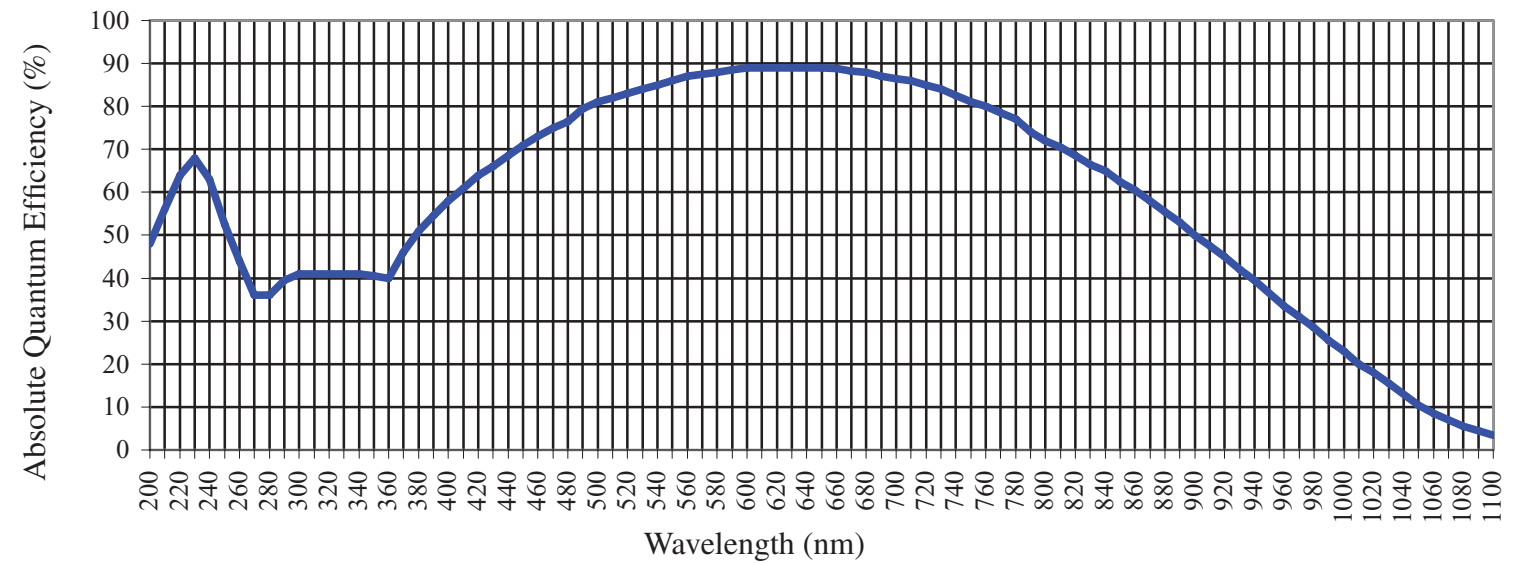

KODAK VERY LARGE FORMATS: KAF-16803 & KAF-090000

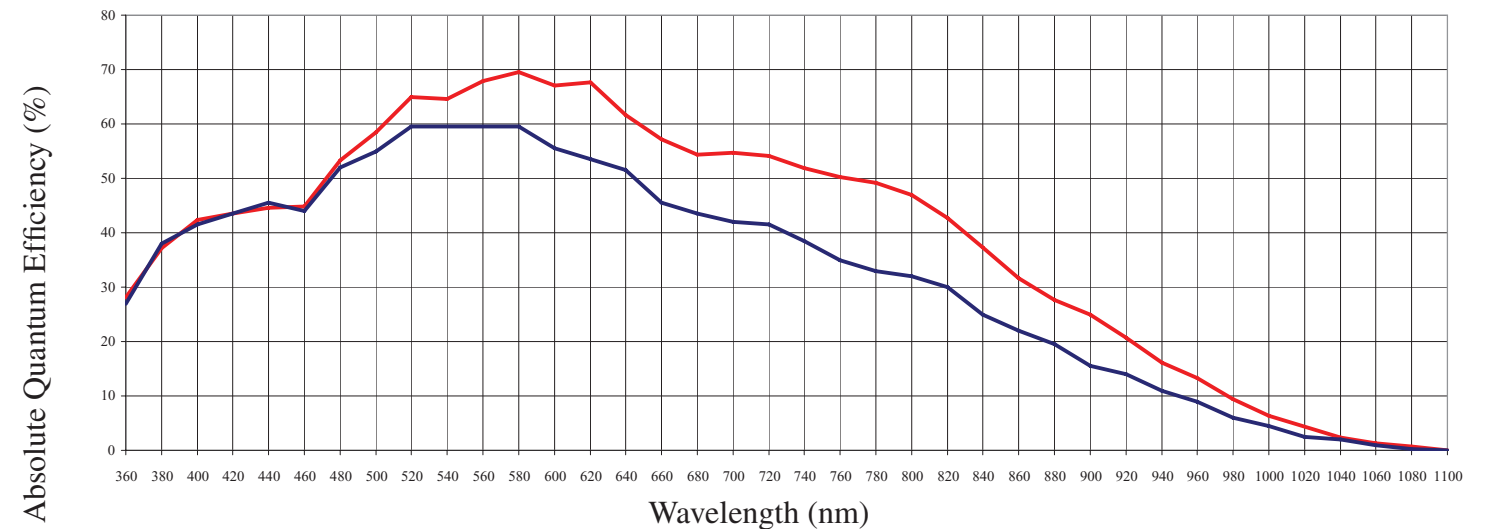

— Kodak KAF-090000 — Kodak KAF-16803

CCD SELECTION, PART 3

CCDs come in many shapes and sizes, as well as several different architectures. Some architectures were developed specifically to address the needs of extremely low light applications like astronomy (back-illuminated CCDs). Other technologies can be adapted to astronomy with excellent results, but a bit more patience and diligence may be necessary (interline transfer CCDs). Here are some ideas to keep in mind:

QUANTUM EFFICIENCY

Higher sensitivity = higher quantum efficiency = shorter exposures to get the same results. Shorter exposures = more time for other exposures and less frustration with guiding and tracking. The peak value of a quantum efficiency curve does not tell the full story of a CCD's sensitivity. The area under the curve gives the true comparison of a CCD's relative sensitivity. Twice the area under the curve = half the time making the exposure. Or, use the same exposure time, but get twice the signal. Apogee supports back-illuminated, front-illuminated, and interline transfer devices. Back-illuminated CCDs have the highest overall sensitivity. However, they are subject to etaloning (aka "fringing") in the near-infrared. Front-illuminated CCDs are much less expensive than back-illuminated CCDs. Make your own choices regarding the Biggest Bang for the Buck.

UV & NIR WAVELENGTHS

Between 200-300 nm: E2V Back-illuminated UV enhanced CCDs
Between 300-400 nm: most Kodak CCDs have zero QE at 300 nm, increasing linearly to >40% at 400 nm.
Near Infrared: Back-illuminated CCDs have the highest QE, but they are also subject to fringing (also known as "etaloning") with monochromatic NIR (simply put, the light bounces around inside the CCD itself). Some companies have developed proprietary versions of CCDs that minimize, though not eliminate, the effect by changing the thickness of the CCD itself.

PIXEL SIZE

The smaller the pixel, the lower the signal that can be stored in the pixel ("full well capacity"). If the noise per pixel is the same for two cameras, lower full well means lower signal-to-noise, or compromised image quality. Such a compromise is hard to see when doing bright field imaging. But when doing low light imaging, higher signal to noise means pulling out those faint elements without making the bright areas into a burned white blob.

In many cases, using a smaller pixel in order to obtain higher pixel resolution is actually dysfunctional. For example, in the field of microscopy, pixels smaller than 6 microns do not provide additional spatial information. At only 4X magnification, with a numerical aperture of 0.1 and a wavelength of 550 nm (green), the limit to practical resolution is about a 3.65 micron feature. Such a feature maps to 14.6 microns on the CCD. Nyquist sampling requires oversampling by a factor of 2 in order to accurately reconstruct the signal. Thus, a 7.3 micron pixel is small enough to gather all the spatial information provided by the microscope. As magnification is increased, the required size for the pixel also increases. Pixels in the range of 6 to 8 microns are the ideal match for microscopy, storing maximum signal without compromising spatial sampling.


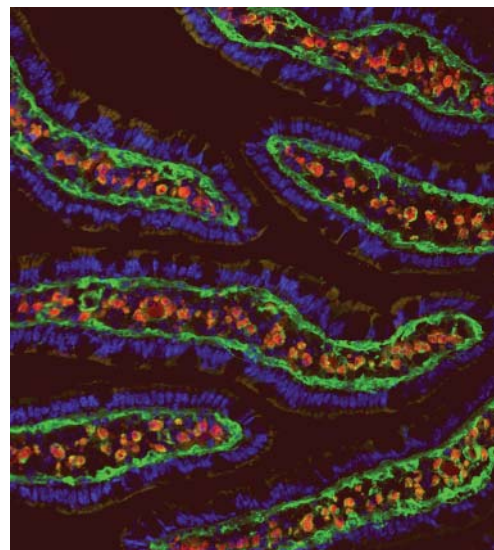



Image: Gary McAnally, Apogee Instruments. Slide courtesy of Chroma.

COLOR CCDS

Color CCDs are convenient for one-shot color, but they compromise in several ways. First, the typical red-green-blue (RGB) Bayer pattern over the pixels of the CCD (see below) cannot be changed--you cannot do monochromatic imaging one day, RGB the next, and cyan-magenta-yellow (CMY) on the third. Second, color CCDs cannot deliver the full resolution of the imager. They can, however, deliver all three color channels at exactly the same instant in time.



Typical RGB Bayer filter pattern designed to mimic the responsivity of the human eye.

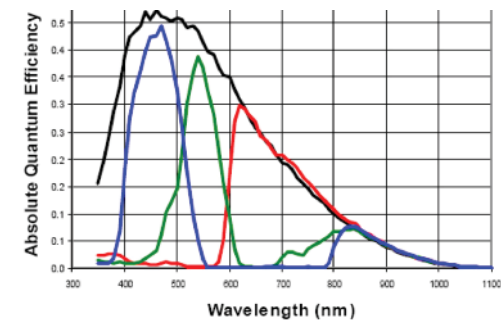

Quantum efficiency of the Kodak KAI-16000 CCD: black line is monochrome version; RGB lines are the color version.

DYNAMIC RANGE

Interline transfer CCDs have, at most, a full well capacity of about 50K electrons. If the electronics limits the read noise to 8-10 electrons, this is a dynamic range of 50K/10 = 5000:1, or about 12.3 bits. Most argue for oversampling by an extra bit, or some argue even two. However, a 16-bit analog-to-digital (AtoD) converter does not upgrade a 12 bit imager into a 16 bit imager. A Kodak KAF-1001E (Alta U6 camera), using the low noise (aka high gain) output amplifier, can be operated at 6 electrons noise with a full well of 200K electrons, or a dynamic range of more than 30K:1, about 15 bits.

INTERLINE TRANSFER CCDs

Interline transfer CCDs, up to the scale of 35mm film, have inherent anti-blooming, but less dynamic range and lower quantum efficiency than Kodak's other front-illuminated offerings. Interlines also have high dark current in the storage diodes, as well as some leakage through the storage diode masks. Mass markets for interline CCDs mean much lower prices per pixel, and a great entry point into professional level imaging.

Because interline CCDs shutter the exposure by shifting the charge from the photodiode section of the pixel to the storage diode of the pixel, exposure times can be as short as a few microseconds. Time between exposures is determined by the time required to read out the entire CCD, which varies from camera to camera.

Interline transfer CCDs cannot do time-delayed integration (also known as "drift scan" mode) because charge is not transferred from photodiode to photodiode, but rather into the masked storage diode.

DARK CURRENT

Thermally generated signal, or dark current, is not noise. The shot noise component of the dark current is one element of noise, which is the square root of the dark current. You can correct for the dark current itself if you can measure it, which requires the camera's cooling to be programmable and stable. The deeper the cooling, the less correction you're going to have to do.

E2V CCDs: AIMO & NIMO

E2V's AIMO (Advanced I Metal Oxide, aka MPP) CCDs have hundreds of times less dark current than non-IMO (NIMO) CCDs. Some variations of their CCDs, such as deep depletion devices with high QE in the near IR, are only available as NIMO devices.

CCD GRADES

Each manufacturer's specification sheet for an imager defines the cosmetic grades for that specific imager. Different manufacturers use different procedures; a grade 1 of Imager A may allow column defects, but a grade 2 (lower grade) of Imager B may not. Kodak usually grades their CCDs at about 25°C, and most of their defects disappear in cooled cameras when the images are flat-fielded. In most cases, you cannot see the difference between the grades. Other companies, such as E2V, grade their CCDs at low temperatures, so their defects are less likely to disappear when the CCD is cooled.

Defects on CCDs do not grow over time, nor do lower grade CCDs wear out faster. Most lower grade Kodak CCDs no longer allow column defects. These lower priced CCDs are excellent bargains.

You may get an unwanted surprise if you do not check the data sheets for each CCD carefully before purchasing a system. Some large format CCDs allow several column defects in the "standard grade" CCD,

ANTI-BLOOMING

Anti-blooming (AB) bleeds off excess charge from individual pixels so that it does not spill over into its neighbors and cause a white stripe down the column. For applications like astrophotography, AB preserves the aesthetics of the image. For photometric applications, AB can be used if exposure times are carefully controlled to avoid excess charge. The disadvantages of AB: normally it lowers full well capacity and quantum efficiency.

SPECSMANSHIP


CCD manufacturers as well as camera manufacturers both describe their products in terms of typical performance, and in some cases, specify worst acceptable performance. A CCD data sheet may, for example, say "typical 15 electrons noise" and "maximum 20 electrons noise" (under very specific and perhaps irrelevant conditions). As a result, camera manufacturers using such a CCD must also use "typical performance", or sort CCDs at a potentially large increase in cost. The difference between typical and guaranteed is sometimes large, such as a factor of two in dark current.

KODAK BLUE PLUS CCDs

CCDs create charge due to the photoelectric effect. In order to create an image rather than random electricity, the charge must be held where it was created. "Traditional" CCDs using from one to four polysilicon gates carry a voltage that traps the charge until transferred. Polysilicon has limited transmissivity. Indium tin oxide (ITO) gates have higher transmissivity, but lower charge transfer efficiency. Kodak's combination of one polysilicon gate and one ITO gate is marketed as Blue Plus (because of the increase in blue sensitivity). The overall sensitivity of Blue Plus CCDs is much higher than multi-phase front-illuminated CCDs using only polysilicon gates. However, when researching point sources of light, it is good to keep in mind that there is a marked increase in quantum efficiency on the ITO side of each pixel. (See MICROLENSES below).

MICROLENSED CCDs

Many CCDs now use microlenses over each pixel. In the case of interline transfer CCDs, the microlenses focus the light onto the photodiode. In the case of Blue Plus CCDs (see above), the microlenses focus the light onto the ITO gate side of the pixel. Microlenses greatly improve overall quantum efficiency, but introduce some angular dependency. Fill factor is normally less than 100%. See data sheets for individual CCDs for details.

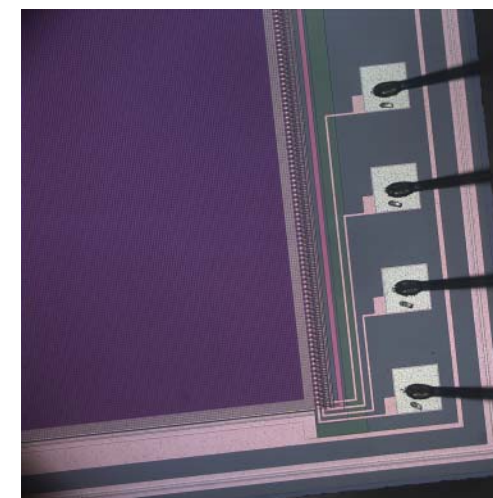

THANKS (A PARTIAL LIST OF APOGEE INSTRUMENTS CUSTOMERS)

Apogee Instruments would like to express our gratitude to the thousands of customers from around the world that have brought so much to our lives since 1994.

Aerospace Corporation • Air Force Research Laboratory • Aloe Ridge Observatory (South Africa) • American Red Cross • Anglo-Australian Observatory • Ankara University Observatory (Turkey) • Apache Point Observatory • Appalachian State University • Argonne National Laboratory • Astronomical Institute of the Czech Republic • Astronomical Observatory Belgrade (Yugoslavia) • Astrophysical Observatory, College of Staten Island • Auckland Observatory (New Zealand) • Bacs-Kiskun Observatory (Hungary) • Baja Astronomical Observatory (Hungary) • Ball Aerospace • Bang & Olufsen (Denmark) • Baton Rouge Observatory • Baylor University • Bechtel • Beijing Observatory (China) • Big Bear Solar Observatory • Boeing • Bohyunsan Optical Astronomy Observatory (Korea) • Boston University • Brigham Young University • California Institute of Technology • Centre National de la Recherche Scientifique (France) • Centro de Investigaciones en Optica (México) • Chiang Mai University (Thailand) • Chiba University (Japan) • Chinese University of Hong Kong • Clemson University • Colorado School of Mines • Columbia University • Complejo Astronómico El Leoncito (Argentina) • Copenhagen University (Denmark) • Cork Institute of Technology (Ireland) • Corning • Crimean Astrophysical Observatory (Ukraine) • Czech Technical University (Czech Republic) • Daimler Benz Aerospace (Germany) • Department of National Defence, Canada • DLR e.V. (Germany) • Dublin Institute for Advanced Studies, Dunsink Observatory (Ireland) • Dworp Observatory (Belgium) • Eastman Kodak • Ege University (Turkey) • Florida Institute of Technology / SARA • Ford Motor • Fox Chase Cancer Center • Fudan University (China) • Fuji • Fujitsu • Gemini Telescope Project • Göteborg University (Sweden) • Harvard-Smithsonian Center for Astrophysics • Harvard College Observatory • Heron Cove Observatory • Hida Observatory (Japan) • High Energy Accelerator Research Organization (Japan) • High Frequency Active Auroral Research Program (HAARP) • Hiroshima University (Japan) • Hitachi • Hong Kong University of Science & Technology • Imation • Indian Institute of Astrophysics • Industrial Technology Research Institute (ITRI) (Taiwan) • Institute for Astronomy, Hawaii • Institute of Astronomy (Switzerland) • Institute of Astronomy and Astrophysics (Taiwan) • Institute of Atomic and Molecular Sciences (Taiwan) • Institute for Quantum Physics (Switzerland) • Instituto de Astrofísica de Andalucía (Spain) • Instituto de Astrofísica de Canarias (Spain) • Inst. Estudis Espacials de Catalunya (Spain) • International Science & Technology Centre (Russia) • IVIC-CBB (Venezuela) • J.Paul Getty Museum • Jagellonian University (Poland) • Japan Atomic Energy Agency • Jet Propulsion Laboratory • Johns Hopkins University • Kimberly-Clark • Kim-Hae Observatory (Korea) • Kitt Peak National Observatory • Konkoly Observatory (Hungary) • Korea Astronomical Observatory • Korea Research Institute of Standards and Science • Kwasan Observatory (Japan) • Kyoto University (Japan) • Lancaster University (UK) • Landessternwarte Heidelberg-Königstuhl (Germany) • Las Cumbres Observatory • Lawrence Berkeley National Laboratory • Lawrence Livermore National Laboratory • Lick Observatory • Liverpool John Moores University (UK) • Lockheed Martin • London Health Sciences Centre (Canada) • Los Alamos National Laboratory • Lucent Technologies • Lund Observatory (Sweden) • Mauna Loa Observatory • Max Planck Institute (Germany) • McGill University (Canada) • MIT • MIT Lincoln Laboratory • Mt. Cuba Astronomical Observatory • Mt. Diablo Observatory • Mt. Stromlo Observatory (Australia) • Mt. Wilson Observatory • Multiple Mirror Telescope • Nagoya University (Japan) • NASA Goddard SFC • NASA Marshall SFC • NASA Langley Research Center • National Astronomical Observatory (Japan) • National Central University (Taiwan) • National Cheng Kung University (Taiwan) • National Health Research (Taiwan) • National Institute for Advanced Interdisciplinary Research (Japan) • National Institute of Advanced Industrial Science and Technology (Japan) • National Institute for Materials Science (Japan) • National Institute of Standards & Technology • National Oceanographic and Atmospheric Administration • National Solar Observatory • National Sun Yat-Sen University (Taiwan) • National Tsing Hua University (Taiwan) • National University of Ireland • Naval Post Graduate School • Naval Research Laboratory • Northwestern University • NTT (Japan) • Oak Ridge National Laboratory • Observatoire Côte d'Azur (France) • Observatoire de Geneve (Switzerland) • Observatorio "Carl Sagan" (Mexico) • Occidental College • Okayama Astrophysical Observatory (Japan) • Oxford University (UK) • Osaka University (Japan) • Oulu University (Finland) • Panasonic • Physical Research Laboratory (India) • Police Scientific Development Branch, Scotland Yard (UK) • Pomona College • Portland State University • Princeton University • Purdue University • Purple Mountain Observatory (China) • Queens University (Canada) • Rice University • Riken (Japan) • Rockefeller University • Royal Military College of Canada • Royal Observatory (Edinburgh, Scotland) • Russian Academy of Sciences • Sandia National Laboratory • Science and Technology Centre of Ukraine • Shamakhy Astrophysical Observatory (Azerbaijan) • Smithsonian Observatory • South African Astronomical Observatory • Stanford University • State Universities of Arizona, Georgia, Iowa, Louisiana, Michigan, Montana, New York (SUNY), North Carolina, Ohio, Pennsylvania, Tennessee, and Texas • Stanford University • Starkenburg Observatory (Germany) • Sternberg Astronomical Observatory (Russia) • Steward Observatory • Stockholm Observatory (Sweden) • Subaru Telescope • Swarthmore College • Tel Aviv University • Temple End Observatory (UK) • Tenagra Observatories • Texas A&M University • Texas Tech University • Tokyo Institute of Technology • Tokyo University • Toshiba • Tuorla Observatory (Finland) • Turku Centre for Biotechnology (Finland) • Universidad de Buenos Aires (Argentina) • Universidad de Sonora (Mexico) • Universidade Federal da Paraíba (Brazil) • Universität Hamburg (Germany) • Universität Innsbruck (Austria) • University College Dublin (Ireland) • University of Amsterdam (Netherlands) • University of the Andes (Venezuela) • University of Auckland (New Zealand) • University of Bern (Switzerland) • University of Birmingham (UK) • University of Bologna (Italy) • Universidad de Entre Rios (Argentina) • University of Chicago • Universities of Alaska, Arizona, Arkansas, California, Colorado, Georgia, Hawaii, Idaho, Illinois, Indiana, Iowa, Maryland, Massachusetts, Michigan, Nevada, North Carolina, Pennsylvania, Texas, Virginia, Washington, Wisconsin, and Wyoming • University of the Free State (South Africa) • University of Hong Kong • University of Latvia • University of Leicester (UK) • University of Ljubljana (Slovenia) • University of London Observatory (UK) • University of Manchester Jodrell Bank Observatory (UK) • University of Manitoba (Canada) • University of Melbourne (Australia) • University of Miami • University of Munich (Germany) • University of Notre Dame • University of Sao Paulo (Brazil) • University of St. Andrews (Scotland) • University of Toronto (Canada) • University of the West Indies • University of Zurich (Switzerland) • US Naval Observatory • Valencia University Observatory (Spain) • Vanderbilt University • Vatican Observatory • Virginia Military Institute • Visnjan Observatory (Croatia) • Warsaw University Observatory (Poland) • Waseda University (Japan) • Wayne State University • Weizmann Institute (Israel) • Westinghouse • Wise Observatory (Israel) • Yale University • Yerkes Observatory (University of Chicago) • Yonsei University (Korea)



1020 Sundown Way, Ste 150
Roseville CA 95661 USA
tel 916-218-7450
fax 916-218-7451
<http://www.ccd.com>